




# INFINITY MAX AIR 66% OPEN AREA SPECIFICATIONS




## High Density Cooling MAX-AIR™

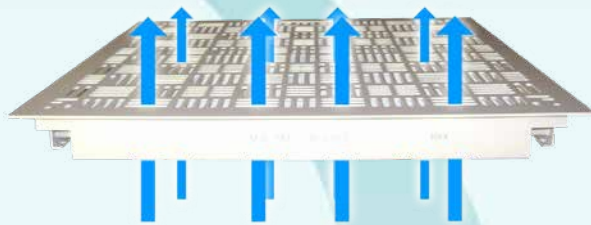

New Quick Corner™ Leveler Adapts Easily and Quickly  
Delivers 7' Cold Air Plume  
Lowers Server Inlet Temps

### High Density Cooling Closer to the Rack 66% High Volume Air Flow

MAX-AIR delivers 15% more cool air volume than Infinity AIRSTREAM and weighs under 28 LBS making it one of the lightest, easiest panels to manage in the data center. MAX-AIR's enhanced slot design allows for greater air volume transfer and maximum cooling effectiveness closer to the rack. Optimal supply air temperatures to Lo-Mid-Hi server inlets improves energy efficiency and overall equipment reliability.

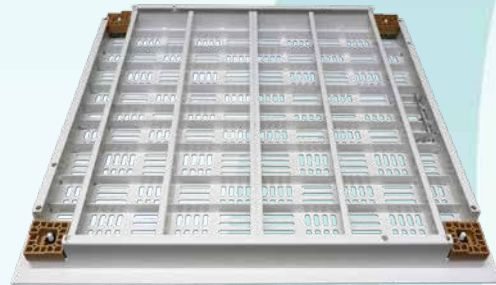

### AIRFLOW CONTROL ACCESSORIES

**Quad Damper Kit** (control range 10 CFM– 1950 CFM)

**FLEX-AIR Intake Hood** (restore positive airflow to servers)

Infinity® Performance Characteristics \*\*

U.S. Patents: No. 7,823,340 No. 8,099,912 No. D561,327

Steel Panel (epoxy finish)	Understructure (wood/steel)	Panel Weight	Design Load	Safety Factor	Ultimate Load	Rolling Load	CFM (.10" H <sup>2</sup> O)	Open Area*
MAX-AIR™	ANY	6.75 lbs /ft <sup>2</sup>	1250 lbs	>3	4000 lbs	850 lbs	1300	66%
AIRSTREAM™	ANY	7.0 lbs /ft <sup>2</sup>	1500 lbs	>3	5000 lbs	1000 lbs	1100	55%

\* percentage of available open area

\*\* Load performance tests are in accordance with CISCA's recommended test procedures

